




PORTABLE HAND WASH SYSTEM

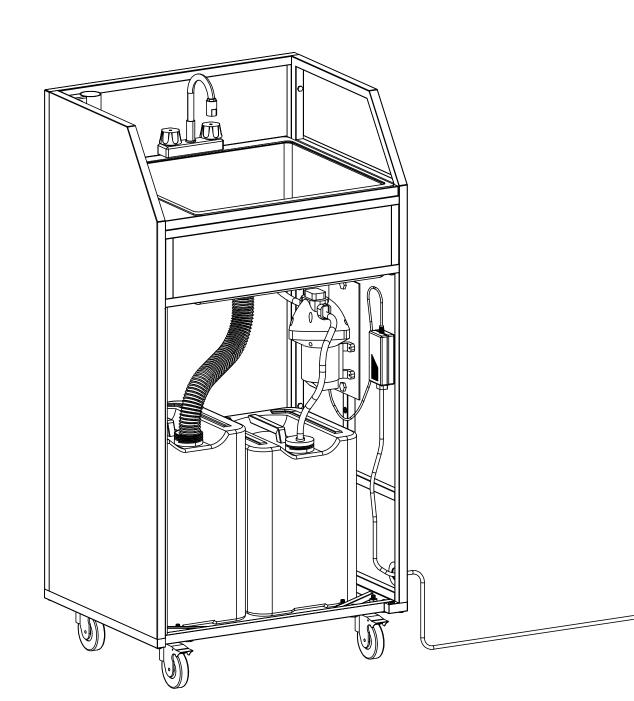


- Read all the instructions before installing.
- Remove all packing materials before you start.
- This installation requires basic mechanical skills.
- Proper installation is the responsibility of the installer.
- Product failure due to improper installation is not covered under the warranty.
- Keep this instruction manual.

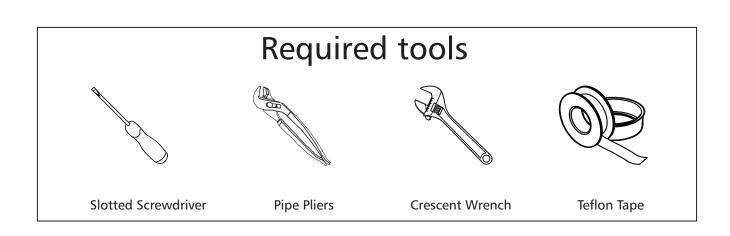

Faucet QTY: 1



Sink QTY: 1



Strainer and Flexible Drain QTY: 1ea






Faucet fitting cap QTY: 1



Water Tanks



Pump QTY: 1



Power adapter QTY: 1



Braided Hose QTY: 1



Plastic hose and clamp QTY: 1 ea





Adapters


QTY: 2






1 x B

Faucet Motion Sensor QTY: 1




Note: Parts are not to scale.


STEP 1: Install faucet sensor as shown below.

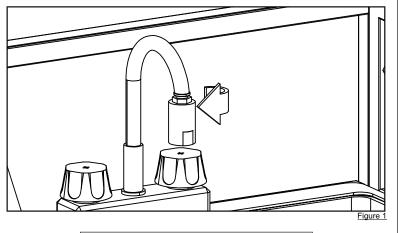



Note: Make sure to fully charge sensor prior use. Charging cable provided.




STEP 2: Install sink drainer by placing it and its seal washer as shown below. Follow diagram to complete drainer installation. Then proceed to install flexible drainer.

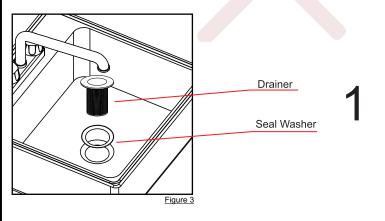

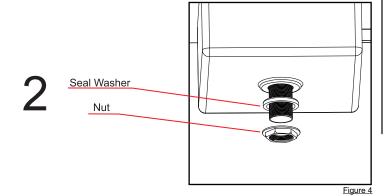


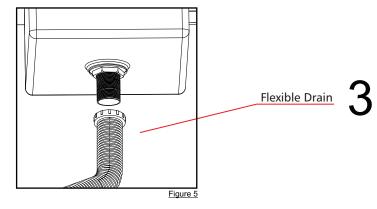


STEP 3: Slide in water tanks, as shown below. Make sure to place 6gal tank (tallest) on the left side.

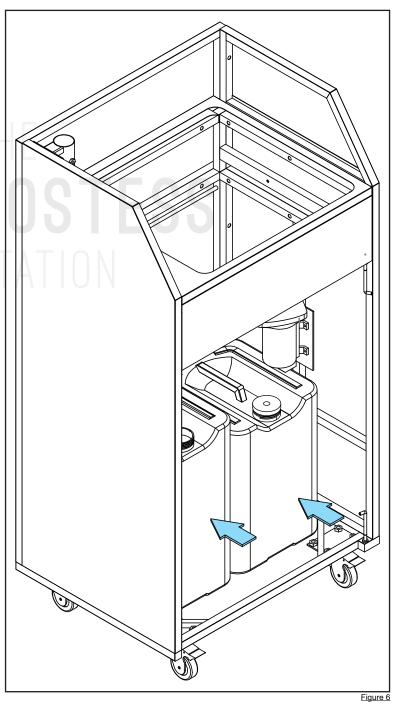


STEP 4: Insert the sink in the working surface cut out.

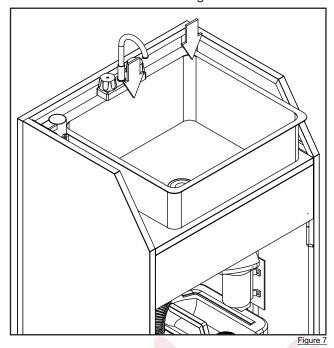

STEP 5: Insert flexible drainer in the 6gal waste water tank opening.

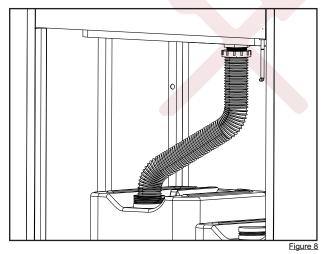


STEP 6: Install clear plastic hose in the pump's inlet port. Secure hose to the nipple fitting using a hose clamp. Take braided hose and connect it to the discharge port. Use as much teflon tape as needed.

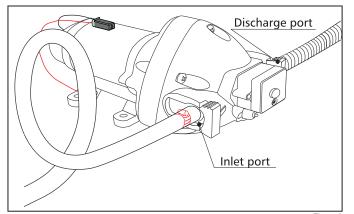


STEP 7: Insert clear plastic hose into the 5gal clean water tank.

Note: Fill clean water tank. Remember to always do so when all electric components are disconnected from a power source.




STEP 8: Plug the pump's power adapter cable to the plug placed on the pump.

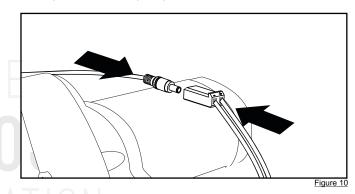

STEP 9: Place power adapter on pre-installed velcro tape on the side wall of the podium. Plug pump to power adapter.

Note: Use bottom grommet to plug power adapter to a wall outlet.

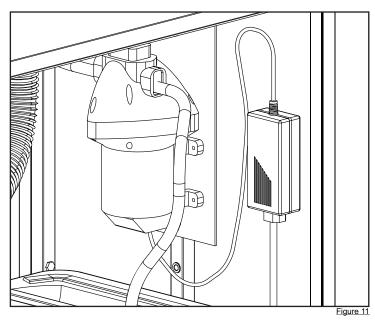

Do not plug the power supply to the wall or battery yet.

Pump is active when plugged in.

There's no on/o ffswitch.

Before turning the system on

- Make sure all the fittings, hoses and cables are properly plugged and/or sealed.
- Double read this guide if necessary.
- Read the maintenance and care guide as well as the pump manufacturer's guide.

Operating the system

To turn it on

- 1. Fill the clean water tank.
- 2. Open the faucet.
- Connect the pump to a wall plug or battery.
- The pump will start working, once you see water coming out of the faucet close the faucet.

To turn it off

- 1. Open the faucet.
- Disconnect the pump's power adapter from wall plug.

Recommendations

- Always keep water inside the the clean water tank, this is critical for the system to work properly.
- The hoses could keep water inside of them after every use.
- The pump is capable of running dry for a couple minutes. Serious damage could occur if it runs dry for long periods of time.
- When disassembling the system there will always be water left in the hoses. Have a towel handy as you are taking apart.

CAUTION: The Security Station IS NOT liable for any injury caused by misuse, spills, accidents nor by improper installations, alterations or repairs. Please use system with caution only.



Contact us

Tel # 844-873-1400 **Fax** # 866-659-3353

E-mail: sales@thehostessstation.com

Visit us at

www.thehostessstation.com

